


MPC-60 drumpad sensitivity modification (adjustable)

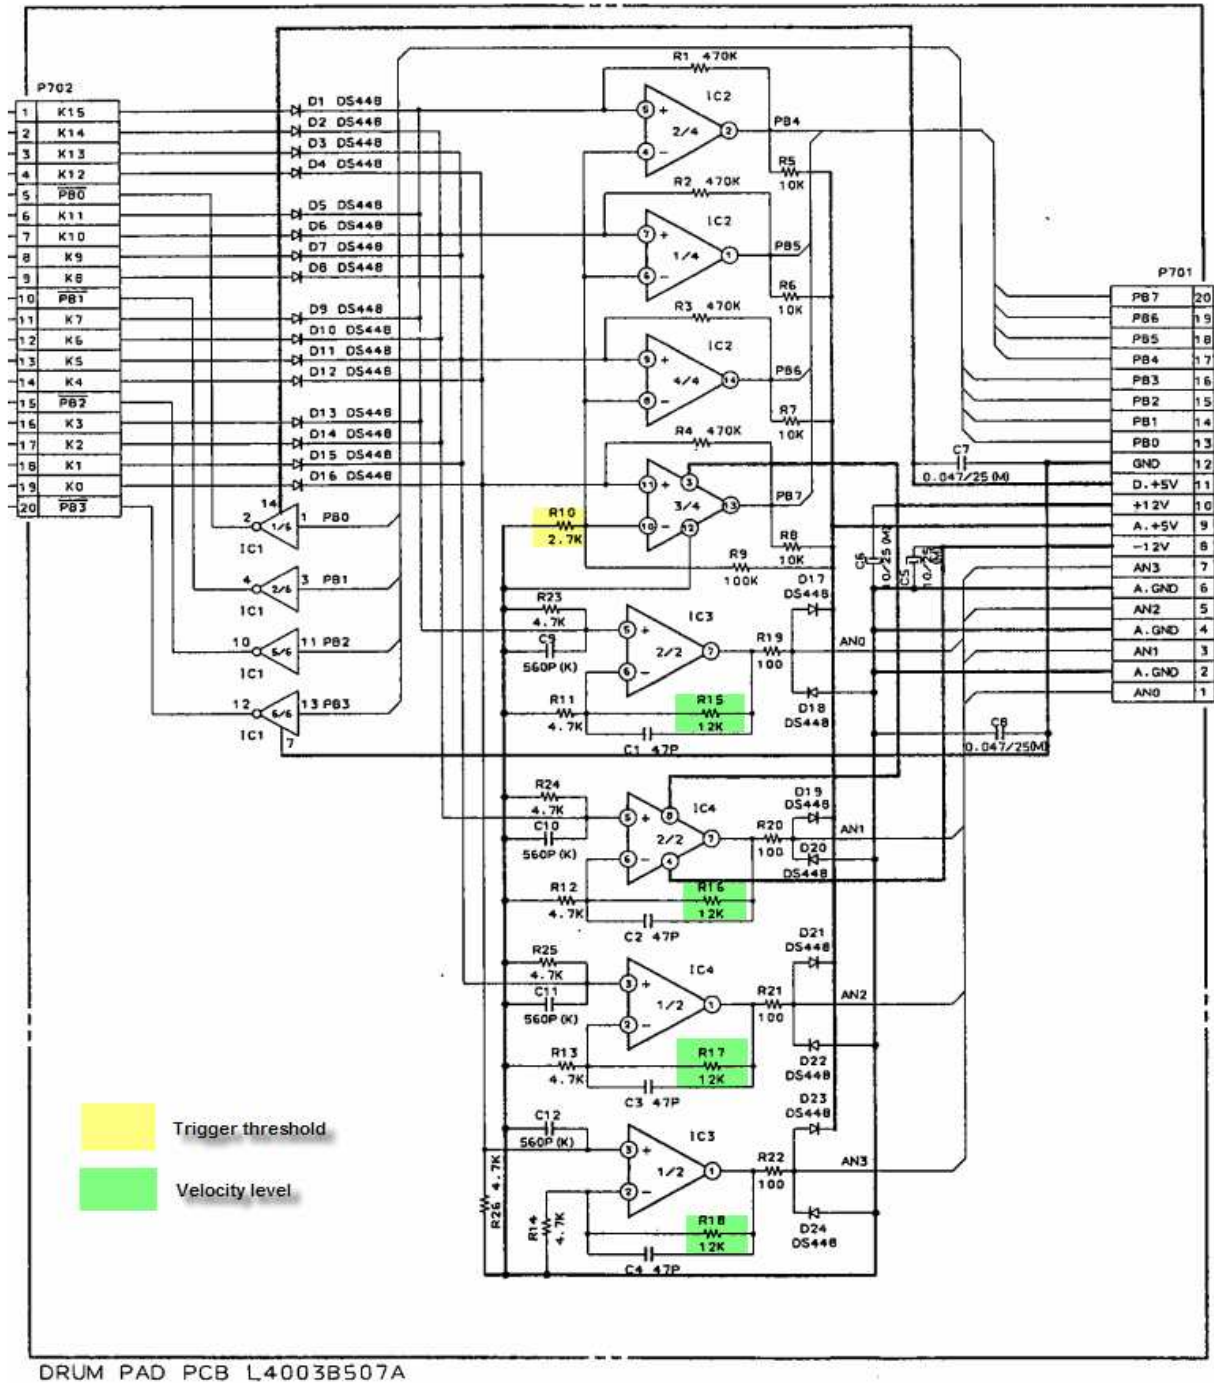

Trigger threshold standard level = $5V \times (2.7/(100 + 2.7)) = 0.13 \text{ Vdc}$

Replace R10 with a 5kOhm trim potentiometer for adjusting the trigger threshold.

Velocity level (gain factor) = $1 + (12/4.7) = 3.55 \times$

Replace R15-R18 with a 100kOhm trim potentiometer for adjusting the velocity level.