


01x and i88x

Connections in Graphic Patchbay,
running on a computer with an OS
that can run the old drivers


Purpose

- Use 01x audio INs and monitor OUT
 - Connect 01x audio 1-8 INs to i88x ADAT OUT, through mLAN
 - The i88x ADAT OUT can then be connected with optical 'cable' to ADAT IN of another audio interface that does have working drivers on the computer that you run your DAW on
 - Connect i88x ADAT IN to 01x monitor OUT, through mLAN
 - Then 01x monitor OUT can be connected to your amplifier or activer monitors
- Use 01x as remote control for your DAW
 - Connect 01x midi 1 OUT to i88x midi IN, through mLAN
 - Let 01x be used as remote control for your DAW, when i88x midi OUT is connected to midi IN of a midi interface that does have working drivers on the computer that you run your DAW on


Hardware setup

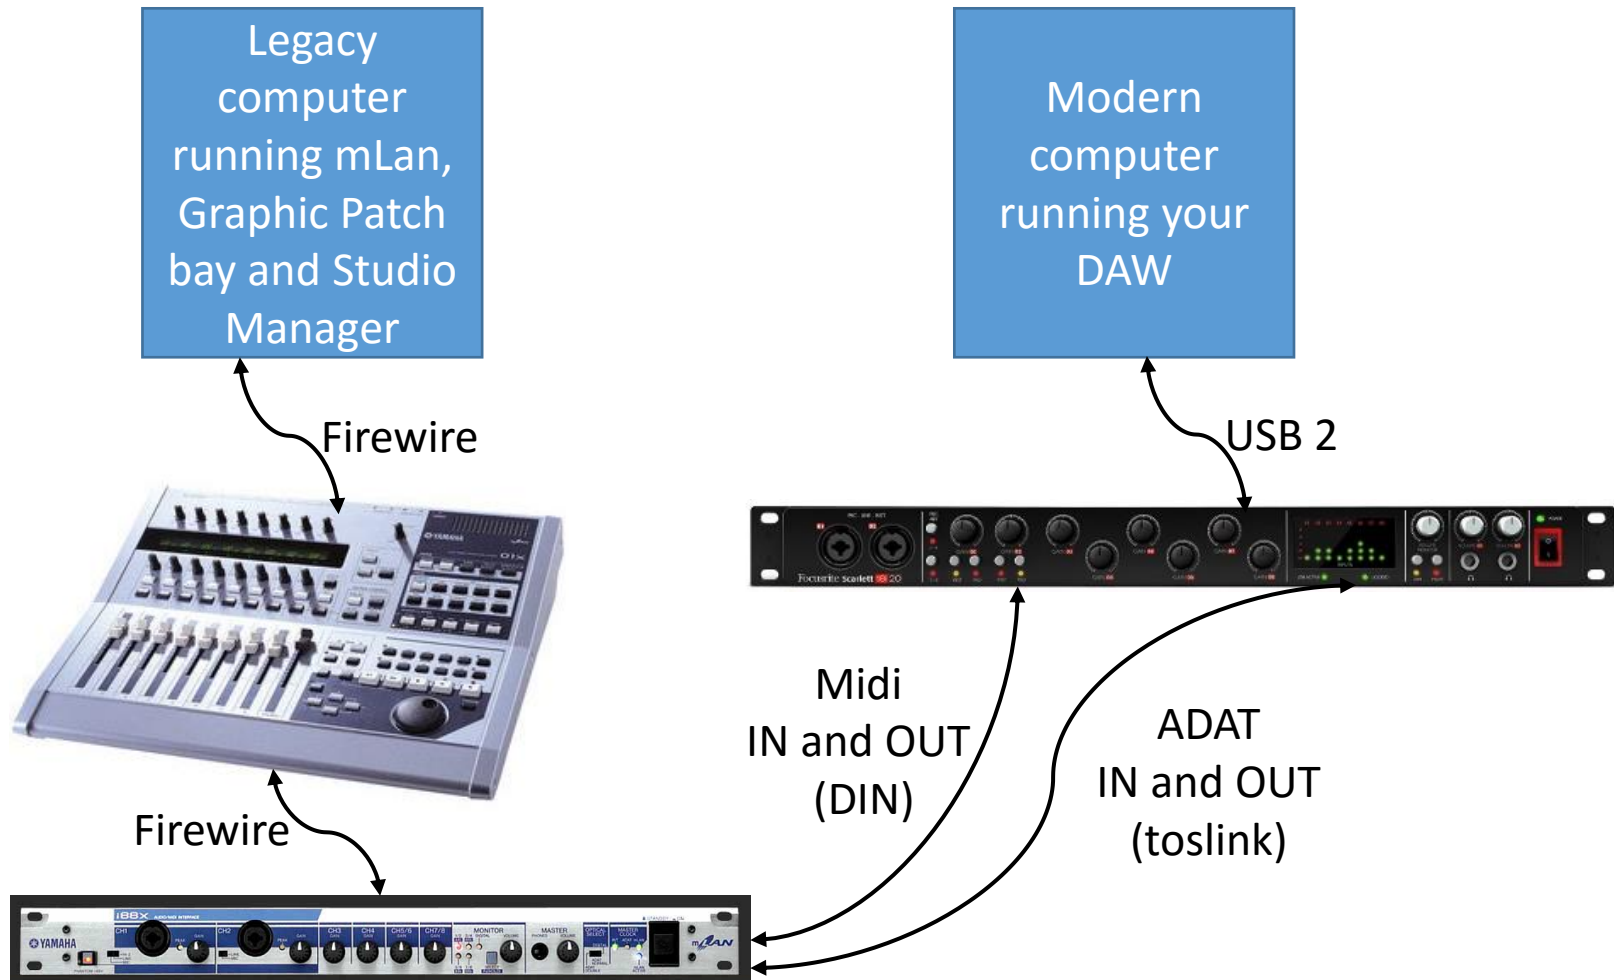


mLan audio connections – audio ins to ADAT

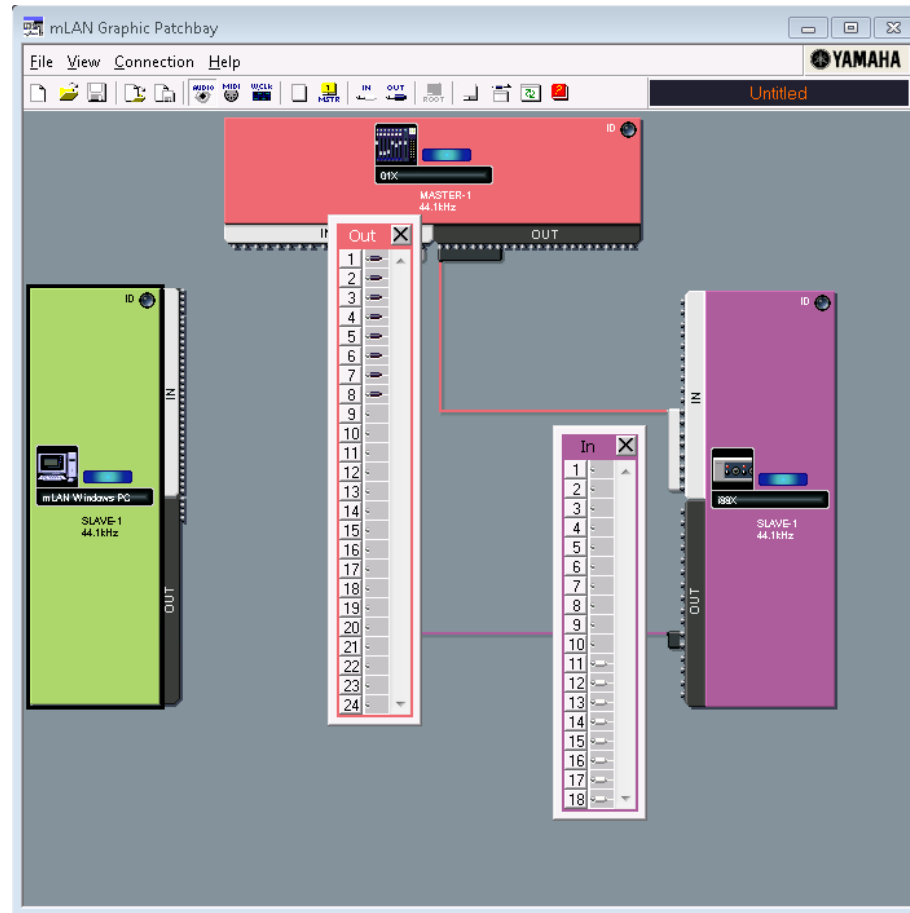

mLan audio connections – monitor returns

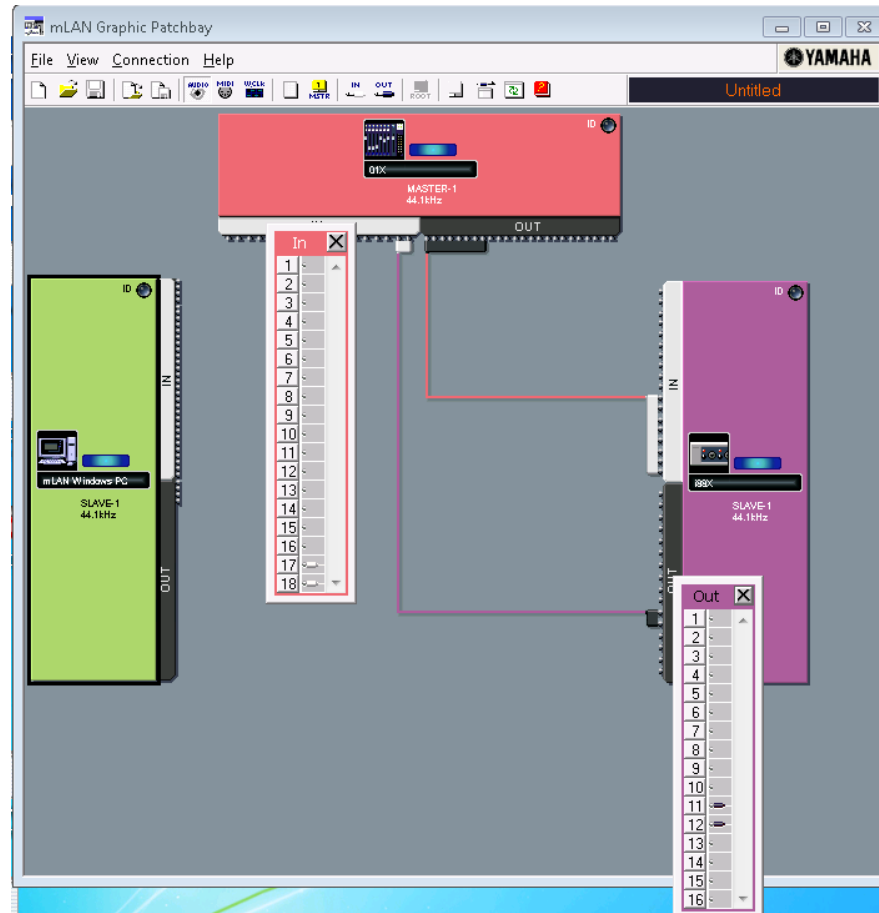


mLan midi connections – 01x remote through i88x

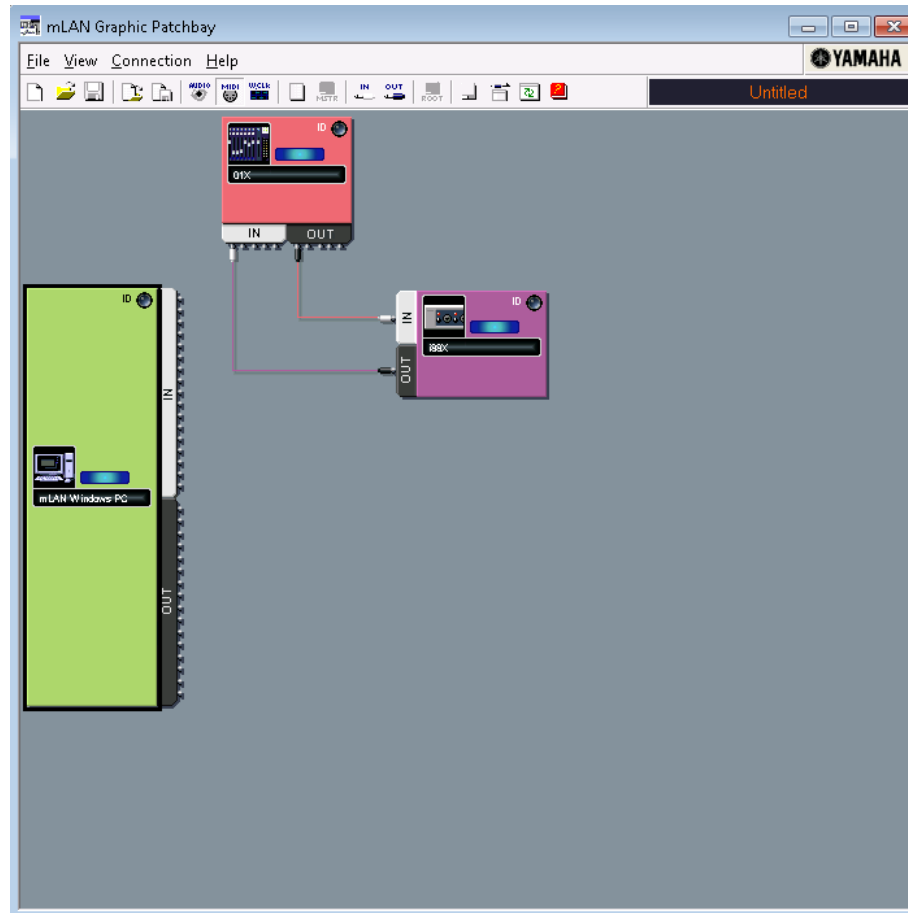

mLan midi connections for using Studio Manager

- Note, the connections on the previous page do not allow you to use your computer with mLan drivers to run Studio Manager.
- Then you need these additional connections
- Note that the 01x midi 1 OUT doesn't have to be connected to the computer midi 1 IN, but on my system I cannot prevent this from happening. It doesn't seem to impact anything I'm using though.

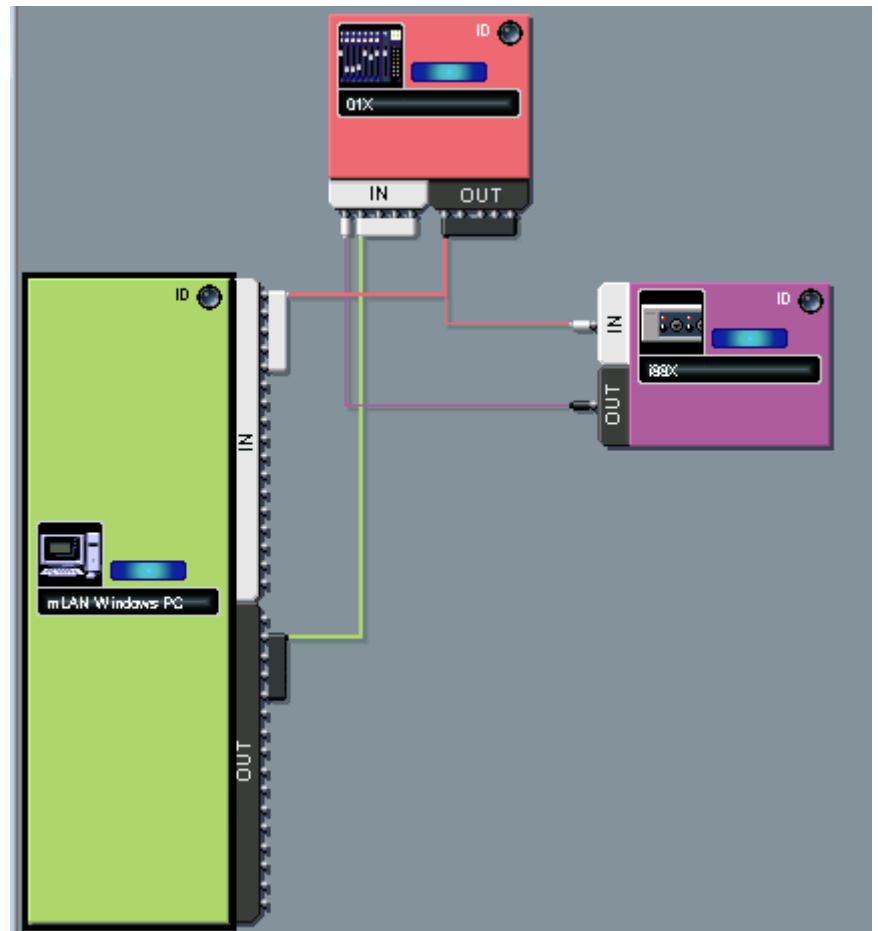

mLan work clock

